




# Self Dumping Hoppers


314 Axminister Dr.  
Fenton, MO 63026

(866) 206-8792

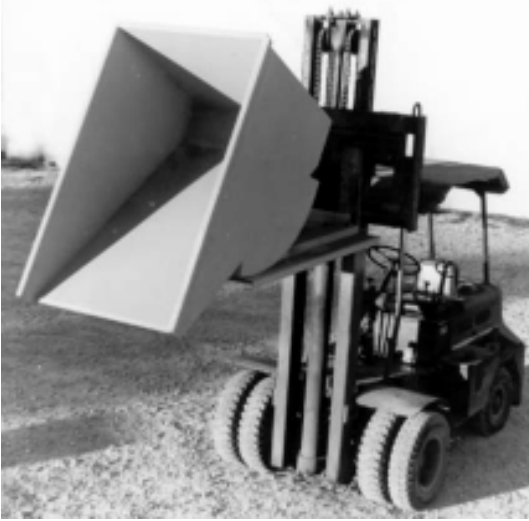

### Features:

- Positive latch to avoid accidental dumping
- Positive return action
- All welded construction
- Optional casters
- Optional lids
- Optional tow bars

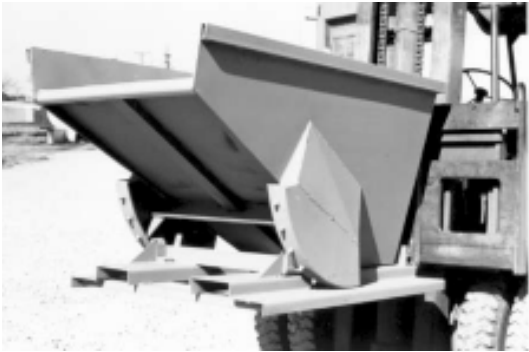

## Light Weight Models

Capacity Cu. Yds.	Dimensions L" x W" x H"	Weight Capacity	Material Thickness (Gauge)	Out to Out Fork Spacing	Model Number
1	65-9/16" x 39-1/4" x 36"	2700	7	26-5/8"	AC-1000LW
1-1/2	71-1/8" x 46-1/8" x 43-1/8"	4050	7	34-5/8"	AC-1500LW
2	71-1/8" x 57-3/16" x 43-1/8"	5400	7	34-5/8"	AC-2000LW

## Standard Models

Capacity Cu. Yds.	Dimensions L" x W" x H"	Weight Capacity	Material Thickness (Gauge)	Out to Out Fork Spacing	Model Number
1/4	40-3/16" x 30-3/8" x 23"	800	10	20"	AC-250
1/3	50-1/2" x 28-5/16" x 29-7/8"	1065	10	16-3/4"	AC-300
1/2	51" x 38-3/8" x 30"	1600	10	26-5/8"	AC-500
3/4	59-1/2" x 39-1/4" x 33-1/4"	2400	7	26-5/8"	AC-750
1	65-9/16" x 39-1/4" x 36"	3200	7	26-5/8"	AC-1000
1-1/2	71-1/8" x 46-1/8" x 43-1/8"	4800	7	34-5/8"	AC-1500
2	71-1/8" x 57-3/16" x 43-1/8"	6400	7	34-5/8"	AC-2000
2-1/2	71-1/8" x 69-3/8" x 43-1/8"	8000	7	34-5/8"	AC-2500
3	73-7/8" x 64-1/2" x 52-7/8"	9600	7	35-3/4"	AC-3000
4	73-7/8" x 81-1/2" x 52-7/8"	12800	7	35-3/4"	AC-4000
5	73-7/8" x 99-1/2" x 52-7/8"	16000	7	35-3/4"	AC-5000

## Heavy Weight Models

Capacity Cu. Yds.	Dimensions L" x W" x H"	Weight Capacity	Material Thickness (Gauge)	Out to Out Fork Spacing	Model Number
1/2	51" x 38-1/8" x 30"	1850	7	26-5/8"	AC-500HW
1	65-9/16" x 39-1/4" x 36"	3700	3	26-5/8"	AC1000HW